

MBC Multiple Boiler Control AMB4BBX

- Operation of up to Four Boilers
- LCD Display
- Push Buttons for Navigating Settings
- Warm Weather Shutdown (WWSD)
- Set Back Scheduling
- Boiler Stage Delay
- Boiler Rotation
- Combustion Air or Alarm Control Relay
- Flow or Combustion Air Proof Delay
- Energy Management System Compatible (0-10 or 2-10 Vdc)
- Sensors Included:(1) Outdoor Sensor(2) Water Temperature Sensors



Ideal for multiple boiler systems




Product **Specifications**

The Baxi Multiple Boiler Control (MBC) operates up to four boilers and resets the heating system water temperature based on outdoor air temperatures. Baxi boilers are piped in primary/secondary arrangement and the MBC control automatically selects how many boilers are needed to maintain the required heating load. Selecting multiple Baxi boilers maximizes your energy savings and provides backup heating capabilities.

- Up to 4 On/Off Boilers
- Up to 2 On/Off Boilers & 2 Pumps
- Up to 2 Lo/Hi Boilers

Control Outputs	
Boiler 1-4 Output Relay Rating	230 Vac, 5 A, 1/3 hp
DHW or Primary Pump Relay	230 Vac, 5 A, 1/3 hp
Primary Pump Relay	230 Vac, 5 A, 1/3 hp

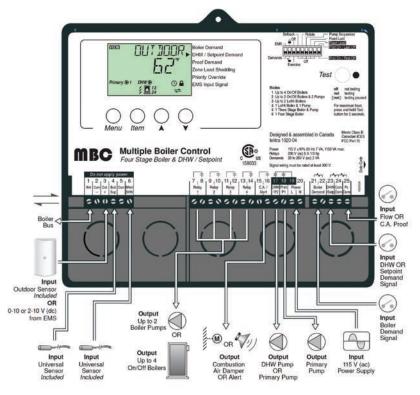

MBC | AMB4BBX Multiple Boiler Control

Control Inputs		
Outdoor Sensor	NTC 10 k, @ 77°F (25°C)	
Boiler Supply Sensor	NTC 10 k, @ 77°F (25°C)	
Boiler Return Sensor	NTC 10 k, @ 77°F (25°C)	
Boiler Heating Demand Input Signal	20 to 260 Vac	
DHW or Setpoint Demand Input Signal	20 to 260 Vac	
Flow Proof or Combustion Air Demand Input	20 to 260 Vac	

Electrical Specifications		
Ambient conditions	Indoor use only. 32-104°F (0 to 40°C)	
Power Supply	115 Vac, +/- 10%, 60 Hz, 1 ph, 1150 VA Max	
Boiler control and Pump Relay (Volt free)	230 Vac 5 A 1/3 hp	
Demands (Input)	20-260 Vac	
Sensors	NTC Thermistor 10 k @ 77°F (25°C), β	
Combustion Air/Alarm relay output (Volt free)	230 Vac 5 A 1/3 hp	



www.baxiboilers.com



All specifications subject to change without notice.

©2019 ECR International, Inc.
PN 240012796 Rev. [10/11/19]